



**VACON 10 MACHINERY**  
**HOW WOULD YOU LIKE**  
**YOUR AC DRIVE TODAY?**

**VACON**  
DRIVEN BY DRIVES

## EASY ADAPTATION FOR CUSTOMER REQUIREMENTS

The Vacon 10 Machinery is an extremely compact AC drive for machine builders in the power range from 0.25 kW to 5.5 kW. The Vacon 10 Machinery offers ultimate flexibility in integrating the customer requirements into the AC drive.

Its intelligent construction allows easy integration into environments of all kinds, according to the customer needs. The unique Application Interface Board provides pre-defined interfaces, and a possibility of customer-specified interfaces. The Vacon 10 Machinery is specifically suited to the needs of machine builders.

Vacon's new drive is one of the smallest drives in the market today. The size of the drive saves valuable installation space and fits into the smallest of places. Despite the small size, the drive is packed with features such as integrated EMC filters, intelligent navigation and a flexible customer interface. Furthermore, the design of the drive makes it possible for the customer to specify their own interfaces if necessary.

The Vacon 10 Machinery is suited to the machine builders particularly due to its flexible interface – it will satisfy a wide variety of needs with few modifications. The drive will also take its place as an all-round general drive when equipped with the Vacon standard interfaces, which offers e.g. Modbus communication as standard.



# PRODUCT RANGE

## VACON 10 MACHINERY, 208...240 V, 1~ (3~ MOTOR)

AC drive type	Motor shaft power (230 V) and current			Frame size
	P (kW)	I <sub>N</sub> (A)	1.5 x I <sub>N</sub> (A)	
Vacon 0010 -1L-0001-2	0.25	1.7	2.6	MI1
Vacon 0010 -1L-0002-2	0.37	2.4	3.6	
Vacon 0010 -1L-0003-2	0.55	2.8	4.2	
Vacon 0010 -1L-0004-2	0.75	3.7	5.6	
Vacon 0010 -1L-0005-2	1.1	4.8	7.2	MI2
Vacon 0010 -1L-0007-2	1.5	7.0	10.5	
Vacon 0010 -1L-0011-2	2.2	11.0	16.5	MI3

## VACON 10 MACHINERY, 380...480 V, 3~ (3~ MOTOR)

AC drive type	Motor shaft power (400 V) and current			Frame size
	P (kW)	I <sub>N</sub> (A)	1.5 x I <sub>N</sub> (A)	
Vacon 0010 -3L-0001-4	0.37	1.3	2.0	MI1
Vacon 0010 -3L-0002-4	0.55	1.9	2.9	
Vacon 0010 -3L-0003-4	0.75	2.4	3.6	
Vacon 0010 -3L-0004-4	1.1	3.3	5.0	
Vacon 0010 -3L-0005-4	1.5	4.3	6.5	MI2
Vacon 0010 -3L-0006-4	2.2	5.6	8.4	
Vacon 0010 -3L-0008-4	3.0	7.6	11.4	MI3
Vacon 0010 -3L-0009-4	4.0	9.0	13.5	
Vacon 0010 -3L-0012-4	5.5	12.0	18.0	

### MAIN DIMENSIONS

	H (mm)	W (mm)	D (mm)
MI1	157	66	98
MI2	195	90	102
MI3	251	100	109



### VACON 10 MACHINERY TYPE CODE

## VACON 0010-1L-0001-4 MACHINERY + CODES

Product	Input phase	Current rating	Voltage rating	Version
---------	-------------	----------------	----------------	---------

By default, the type codes include the following:

- EMC C4
- API - RS-485
- IP20
- General Purpose application software

+codes:

- +codes are optional
- to change the setup, e.g.
  - API RS-485 -> API Full = SM01
  - EMC C4 -> EMC C2 = EMC 2

## VERSATILE CONTROL I/O

The Vacon 10 Machinery is an easily tailored drive to meet the control requirements of the customer.

The Vacon 10 Machinery architecture is created keeping in mind easy and fast tailoring. This is achieved by the control card of the Vacon 10 Machinery, the Application Interface – API. The API is the interface of the drive, providing the main tailoring element for the customer. A set of API boards is offered as standard, but the API construction also gives the customers a free hand to create application software. Additionally, it even allows the API specification to be integrated into the customer's design.

### Standard API

Vacon offers a set of APIs as standard, which is available from the shelf.

- API – Full
- API – Limited
- API – RS-485

### STANDARD INTERFACES


	Full	Limited	RS-485
+10 V ref	Yes	Yes	-
+24 V out	Yes	Yes	Yes
DI	6	3	1
AI	2 (V and mA)	1 (V or mA)	-
A0	1	-	-
DO	1	-	-
Relay	2	1	1
RS-485	Yes (Modbus RTU)	Yes (Modbus RTU)	Yes (Modbus RTU)

### Customer API

Do you have special needs, an interface setup that has become a brand or even a standard feature in your products? With the API architecture you have a possibility to specify your own API board. Vacon's design service helps you to create the specification to develop and to manufacture the desired solution. For further information, please contact your local Vacon representative.

### Customer-specific applications

The Vacon 10 Machinery supports Vacon's standard Vacon PC tools. These include, for example, Vacon NC61131-3 Engineering Tool which can be used for creating customer-specific software. Vacon offers a design service to create these applications, or they can be designed by the customer or a competent third party.

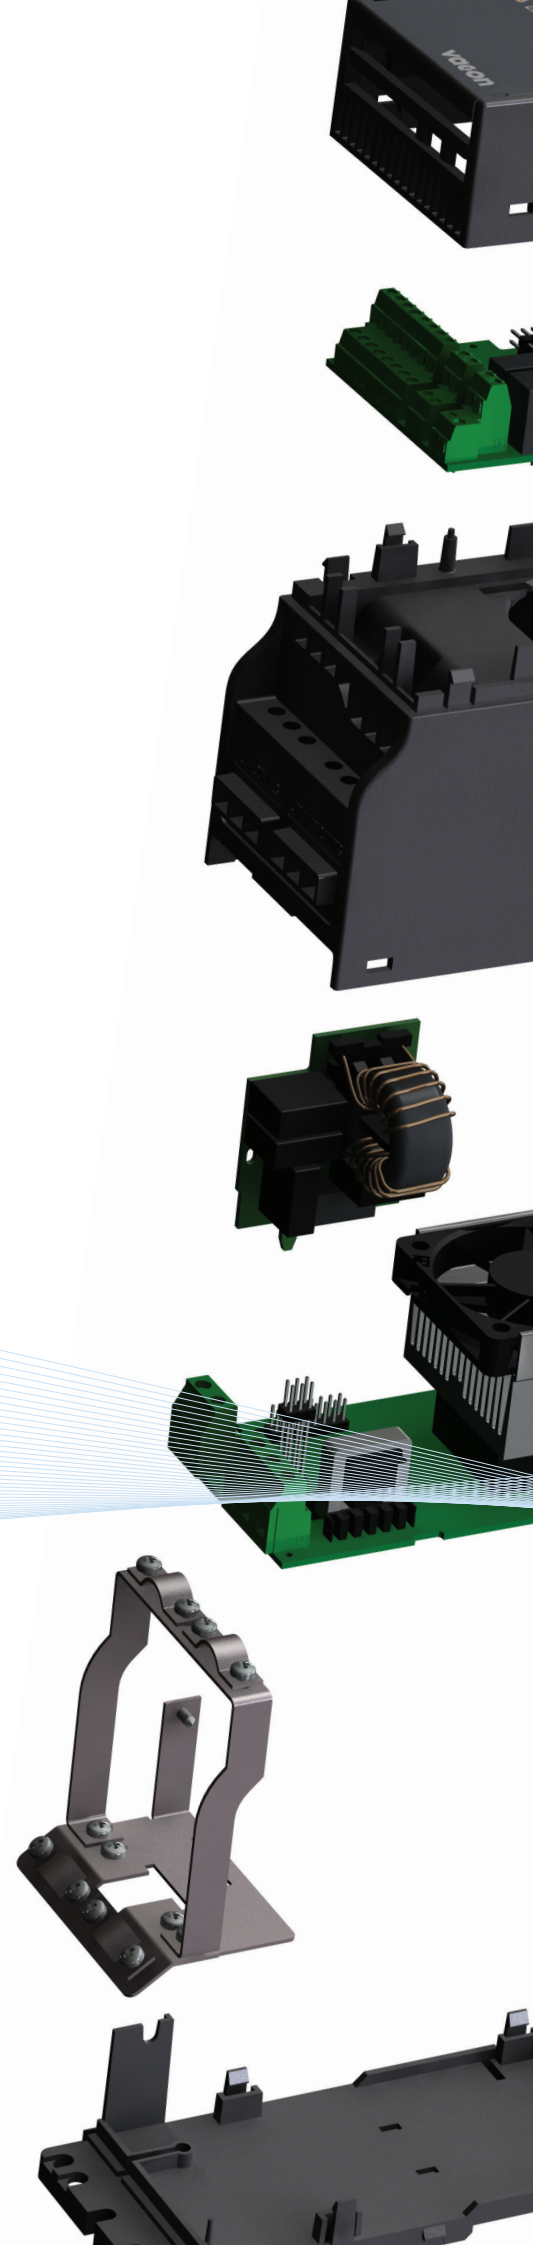





## EMC AND INSTALLATION ENVIRONMENT

The Vacon 10 Machinery fulfils the requirements of EN61800-3 (2004) which sets the limits for both the emission and immunity of radio frequency disturbances. The environment is divided into the 1st and 2nd environments, which, in practice, means public and industrial networks.

Standard EN61800-3 (2004)	Environment	Vacon class	Vacon 10 Machinery 208...240 V	Vacon 10 Machinery 380...480 V
C2	1st (public)	H	Integrated filter	Integrated filter
C3	2nd (industrial)	L	Integrated filter	Integrated filter
C4	2nd (industrial)	N	No filter	No filter
C4	2nd (industrial)	T	Remove EMC screw (see manual)	Remove EMC screw (see manual)

## TOOLS FOR VACON 10

Vacon offers one of the widest range of tools for micro drives in the market. The functionality integrated into Vacon 10 drives gives the customer a possibility to program, commission or monitor the product in a way that they would only normally expect in bigger drives.

### PC tools

The Vacon 10 Machinery supports Vacon's existing PC tools for the required functionality. The software is available on our web site, [www.vacon.com](http://www.vacon.com). The tools are intended for tasks such as commissioning, monitoring, loading various applications and application programming.

The PC is connected to the drive with a Micro Communication Adapter - MCA (option order code) and a cable. There are two options for the cable: standard USB (option order code) and Vacon's own RS-485 cable (option order code).

Vacon NCDrive, Vacon NCLoad and Vacon NC61131-3 Engineering Tool all work for required functions with Vacon's micro products.

### MCA – Micro Communication Adapter

With the MCA the customer can upload and download parameters without powering the drive. This will allow the user to parameterize the drive without first connecting the drive to the mains.



# TECHNICAL DATA

<b>Mains connection</b>	Input voltage $U_{in}$	380...480 V, -15 %...+10 % 3~ 208...240 V, -15 %...+10 % 1~	
	Input frequency	45...66 Hz	
	Connection to mains	Once per minute or less (normal case)	
<b>Motor connection</b>	Output voltage	$0 \dots U_{in}$	
	Output current	Continuous rated current $I_N$ at ambient temperature max. +50°C, overload $1.5 \times I_N$ max. 1 min/10 min	
	Starting current / torque	Current $2 \times I_N$ for 2 secs in every 20 sec period Torque depends on motor	
	Output frequency	0...320 Hz	
	Frequency resolution	0.01 Hz	
<b>Control characteristics</b>	Control method	Frequency Control U/f Open loop sensorless vector control	
	Switching frequency	1...16 kHz; Factory default 6 kHz	
	Frequency reference	Resolution 0.01 Hz	
	Field weakening point	30...320 Hz	
	Acceleration time	0.1...3000 sec	
	Deceleration time	0.1...3000 sec	
	Braking torque	$100 \% \times T_N$ with brake ( $\geq 400$ V, 1.5 kW) $30 \% \times T_N$ without brake	
	<b>Ambient conditions</b>	Ambient operating temperature	-10°C (no frost)...+50°C: rated loadability $I_N$
		Storage temperature	-40°C...+70°C
Relative humidity		0...95 % RH, non-condensing, non-corrosive, no dripping water	
Air quality:			
- chemical vapours		IEC 721-3-3, unit in operation, class 3C2	
- particles		IEC 721-3-3, unit in operation, class 3S2	
Altitude		100 % load capacity (no derating) up to 1000 m 1 % derating for each 100 m above 1000 m; max. 2000 m	
Vibration EN60068-2-6		3...150 Hz Displacement amplitude 1 (peak) mm at 3...15.8 Hz Max acceleration amplitude 1 G at 15.8...150 Hz	
Shock IEC 68-2-27		UPS Drop Test (for applicable UPS weights) Storage and shipping: max 15 G, 11 ms (in package)	
Enclosure class		IP20	
<b>EMC</b>	Immunity	Complies with EN61800-3 (2004)	
	Emissions	230 V: EMC level H: with an internal RFI filter option 400 V: EMC level H: with an internal RFI filter option	
<b>Safety</b>		61800-5-1, EN60204-1, CE, UL, cUL, IEC (see unit nameplate for more detailed approvals)	
<b>Protections</b>	Overvoltage protection	230 V series: 437 VDC; 400 V series: 874 VDC trip level	
	Undervoltage protection	230 V series: 183 VDC; 400 V series: 333 VDC trip level	
	Earth fault protection	Earth fault is tested before every start. In case of earth fault in motor or motor cable, only the frequency converter is protected	
	Unit overtemperature	Yes	
	Motor overload	Yes	
	Motor stall	Yes	
	Motor underload	Yes	
	Overcurrent protection	Yes, trip limit $4.0 \times I_N$ instantaneously	



## FEATURE-RICH AND COMPACT AC DRIVE

### Easy installation and commissioning

- Intelligent menu navigation
- Small physical size
- DIN rail and screw mountable
- Side by side installation
- Vacon NC61131-3 Engineering Tool for creating customer-specific functionality
- Parameter upload and download without the need for a mains power supply

### Extensive hardware

- Integrated EMC filters make the unit suitable for commercial and industrial networks
- Available in the enclosure class IP20 as standard, options for IP21 and NEMA1
- Varnished boards as standard
- Brake chopper as standard in 3-, 400 V, 1.5 kW and higher
- Temperature-controlled fan

### Flexible control architecture

- Modular I/O usage
- RS-485/Modbus as standard
- PI controller as standard
- Several fieldbus options
- External +24 V DC powering to maintain power in the API board and fieldbuses in case the main supply is disconnected
- Design service for customer-specific API board development

### Environment-friendly

- RoHS compliant
- Recyclable materials
- Energy saving
- Decreased mechanical stress
- Reduced noise levels



**Vacon Plc**

Runsorintie 7, 65380 Vaasa, Finland  
Tel. +358 (0)201 2121, Fax +358 (0)201 212 205  
[www.vacon.com](http://www.vacon.com), email: [info@vacon.com](mailto:info@vacon.com)

Vacon Partner